



Fixture Type
Materials
Finish

Surface
Aluminum
White

Lamp Type
Lamp Quantity
Lamp Included
Wattage
Input Voltage
Delivered Lumens
Kelvin
CRI
Power S Type
Power S Quantity
Power S Location
Dimming Type


LED
1
Yes
17 W
120-277 V
1500 lm
3000 K
90
N/A
N/A
N/A
ELV

Designer


DMF

Listings

UL
WET

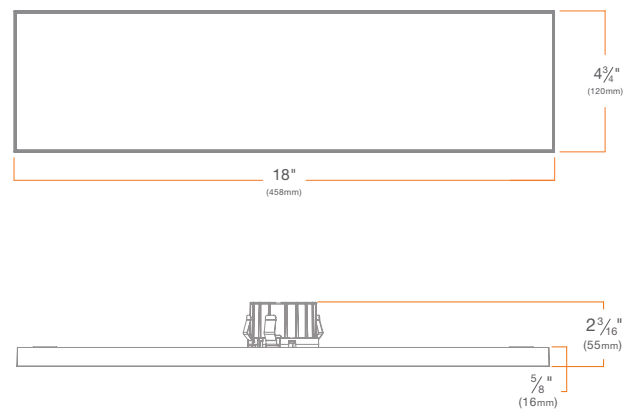

MODULE

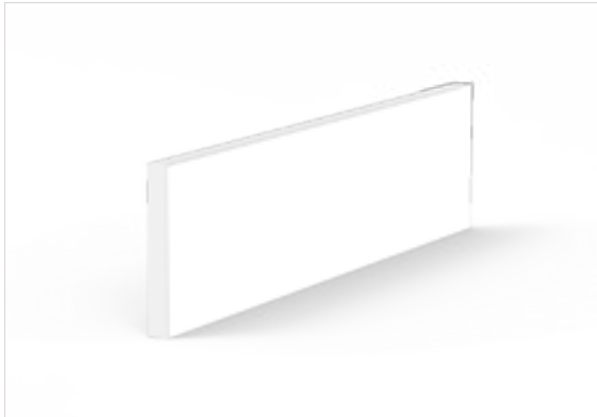

DRD5S

18" Linear Surface Mount Module

DRD5S4L

SUMMARY

LED: Optimized LED array

SHAPE: 18" x 4" rectangle

MODULE LUMENS: 1500 lm (17W)

COLOR QUALITY: 90+ CRI, less than 3-step SDCM

CCT: 2700K, 3000K, 3500K

INPUT VOLTAGE: 120/277V

DIMMING: Down to less than 5% for TRIAC/ELV at 120V, 1% for 0-10V at 120/277V

MAX INPUT CURRENT (120V): 0.15 amps

MAX INPUT CURRENT (277V): 0.06 amps

POWER FACTOR: Greater than 0.9

TOTAL HARMONIC DISTORTION: Less than 20%

AMBIENT OPERATING TEMPERATURE: -20°C to 40°C

EMERGENCY LIGHTING: Optional Emergency LED Driver for lighting up to 90 minutes in event of power failure

PHOTOMETRIC TESTING: Tested in accordance to IESNA LM-79-2008

TRIM: Edgeless die-cast aluminum

LISTINGS: ENERGY STAR® Qualified*, California Title 24 2016-2022 JA8-E Compliant, UL Listed for Wet Location, UL Certified US-CA

LIFETIME: 50,000 hours at 70% lumen maintenance

WARRANTY: 5 year limited warranty

* Refer to ENERGY STAR Certified light fixtures database

PRODUCT BUILDER - TRIAC/ELV, 0-10V

18" LINEAR MODULE

PRODUCT CODE		DIMENSION		SHAPE		LUMENS		CRI		CCT		DRIVER	
DRD5S	Module	4	4" Width	L	Linear	15	1500 lm	9	90+ CRI	27	2700K	[Blank]	TRIAC/ELV
										30	3000K	O	0-10V
										35	3500K		

