




Fixture Type
Materials
Finish

Interior linear Fixture
Aluminium
Black
*consult factory for other finishes

Lamp Type
Lamp Quantity
Lamp Included
Wattage
Input Voltage
Delivered Lumens
Kelvin
CRI
Power S Type
Power S Quantity
Power S Location
Dimming Type

LED
n/a
Yes
5 W/ft
100-277 VDC
500 lm/ft
3000 K
95
Driver
Up to 25 ft
Remote
ELV



Designer


Core

Listings

UL
JA8 Listed
DRY



The **Echo 300 Series** is a linear, architectural lighting solution ideal for installations with continuous runs. Featuring a 2.3-inch aperture, this streamline lighting fixture offers powerful lighting uniformity while seamlessly blending with contemporary and modern spaces.

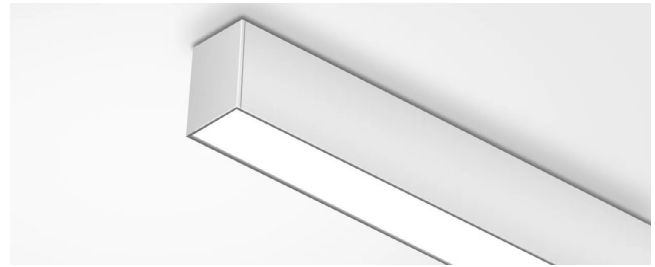

SPECIFICATIONS

TYPE	Surface Suspension Wall
INPUT VOLTAGE	100-277 VAC
APERTURE	2.3 in.
POWER CONSUMPTION	5W/ Ft. 7.5W/ Ft. 10W/ Ft.
LUMEN OUTPUT	Up to 1150 Lm/ Ft. (up/down lighting)
CRI	85+
COLOR TEMPERATURE	Selectable (30K/ 35K/ 40K)
DIMMING	0-10V (12%-100%)
AMBIENT TEMPERATURE	-4°F (-20°C) to 104°F (40°C)
DRIVER	Internal
AVAILABLE LENGTHS	2 Ft./ 3 Ft./ 4 Ft./ 8 Ft.
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5 Years

FEATURES

- Up to 1150 Lm/ Ft.
- Color Temperature selectable from 30K, 35K, 40K
- Selectable Wattage (50%, 75%, 100%)
- Superior Color Rendering Index (CRI)
- 40 Ft. Continuous Lens
- Multiple mounting options
- T-Grid compatible suspended mount
- UL Listed, Damp Rated
- 5-Year Limited Warranty

LUMENS

SURFACE MOUNT			
LENS	5W (LM/FT)	7.5W (LM/FT)	10W (LM/FT)
FROSTED	500	750	1000
LOUVER	350	525	700
MICRO REFLECTOR	450	675	900
REGRESSED	400	600	800


SUSPENDED/WALL MOUNT			
LENS	5W (LM/FT)	7.5W (LM/FT)	10W (LM/FT)
FROSTED	575	860	1150
LOUVER	450	675	900
MICRO REFLECTOR	575	860	1150
REGRESSED	475	710	950




MODEL	MOUNTING	LENGTH	LENS	FINISH	DIMMING	ACCESSORIES
ECH-S300	SM Surface Mount	2 2 Ft. 4 4 Ft.	FR Frosted RG Regressed	WH White	D10 0-10V	EMEG Remote Emergency Battery OCS Occupancy Sensor
	PM* Suspended Mount	3 3 Ft. 8 8 Ft.	LV Louver WW* Wall Washer (30° Tilt)	BK Black		
	WM Wall Mount		MR* Micro Reflector	SI* Silver CU Custom		
	* 10ft. Suspension Cable included		* Not available for Wall Mount	* Wall Mount only		For additional accessories, see page 5




DIMENSIONS




23.7" (Frosted/ Regressed) | 23.82" (Micro Reflector/ Louver)




35.71" (Frosted/ Regressed) | 35.63" (Micro Reflector/ Louver)




47.72" (Frosted/ Regressed) | 47.44" (Micro Reflector/ Louver)



95.24" (Frosted/ Regressed) | 94.69" (Micro Reflector/ Louver)

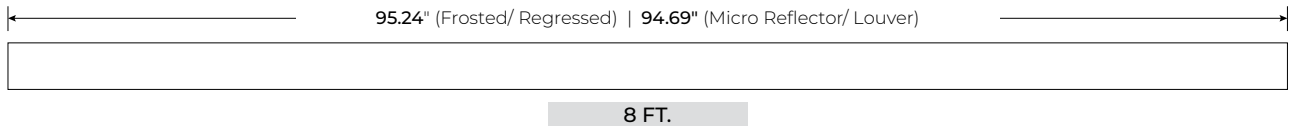


PRODUCT OVERVIEW

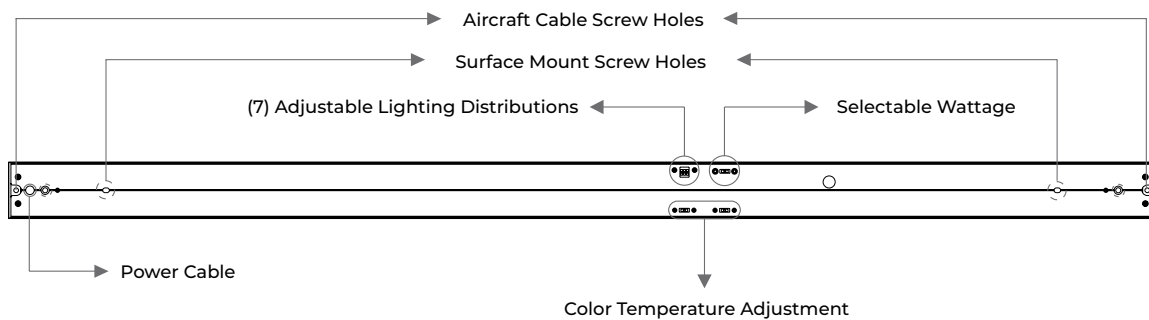


LENS OPTIONS


FR
FROSTED




LV
LOUVER




RG
REGRESSED



MR
MICRO REFLECTOR
*Only available for Surface and Suspended Mount



WW
WALL WASHER
*Only available for Surface and Suspended Mount

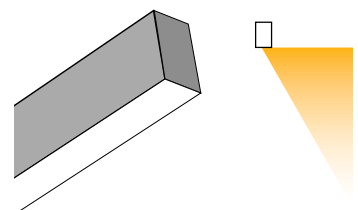


SUSPENSION KIT ACCESSORIES

* Suspension kit accessories include a 10ft. suspension cable.

POWER FEED KIT

ALP-CF-WH
WHITE POWER FEED KIT


ALP-CF-BK
BLACK POWER FEED KIT

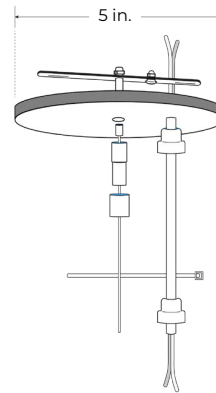

2" NON-POWER FEED KIT

ALP-CSB-WH-2
2" WHITE FEED KIT


ALP-CSB-BK-2
2" BLACK FEED KIT



5" NON-POWER FEED KIT

ALP-CSB-WH-5
5" WHITE FEED KIT


ALP-CSB-BK-5
5" BLACK FEED KIT



OPTIONAL ACCESSORIES

ECH-S300-ST
STRAIGHT JOINER


*Sold Separately

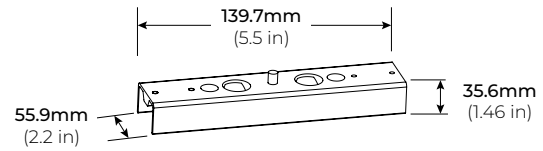

ECH-S300-TLJ
"T-SHAPED" LINE JOINER

*Sold Separately


*Only available for Surface and Suspended Mount

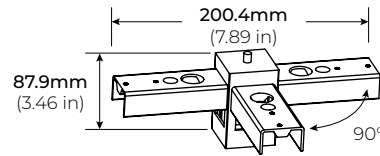

ECH-S300-LJ9
"L-SHAPED" LINE JOINER

*Sold Separately


*Only available for Surface and Suspended Mount



ECH-S300-XLJ
"X-SHAPED" LINE JOINER

*Sold Separately


*Only available for Surface and Suspended Mount

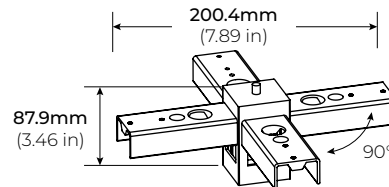

ECH-S300-YLJ
"Y-SHAPED" LINE JOINER

*Sold Separately


*Only available for Surface and Suspended Mount

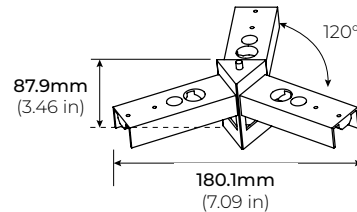

ECH-S300-VLJ
"V-SHAPED" LINE JOINER

*Sold Separately

*Only available for Surface and Suspended Mount

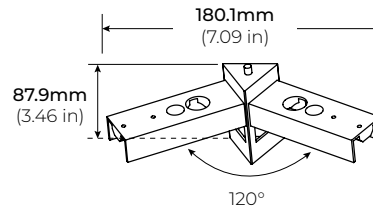

EMERGENCY LED BATTERY (EMEG)


When AC power fails, the Emergency LED Driver (EM) immediately switches to emergency mode; operating for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to charging mode.

* One Emergency Battery Per Driver required.

LUMINAIRE LOAD POWER	60W (MAX.)
FIXTURE EFFICACY	110 Lm/W
STANDBY POWER	< 0.4W
EMERGENCY OPERATION	90 Minutes
OPERATING TEMPERATURE	0°F (0°C) ~ 122°F (50°C)
BATTERY	Lithium
RECHARGE	24 Hrs.
CERTIFICATIONS	UL Listed, CEC
DIMENSIONS	12.76" x 2.13" x 1.57" (LxWxH)




DIMENSIONS

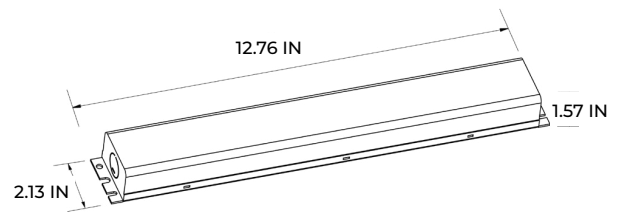

INPUT	
INPUT CURRENT (MAX.)	70 MA
INPUT POWER (MAX.)	3.2W
INPUT VOLTAGE RANGE	100-277V AC, 50-60Hz

OUTPUT	
OUTPUT VOLTAGE	170V DC
OUTPUT WATTAGE	8W
OUTPUT POWER	880 Lm (8W)



REMOTE

