



Fixture Type
Materials
Finish

Exterior Wall
Aluminium
Anodized Satin
*consult factory for other finishes

Lamp Type
Lamp Quantity
Lamp Included
Wattage
Input Voltage
Delivered Lumens
Kelvin
CRI
Power S Type
Power S Quantity
Power S Location
Dimming Type


LED
1
Yes
8W
12 VAC
300
3000 K
85
Driver
Up to 15 fixtures
Remote
n/a

Designer

Hevi

Listings

ETL
WET

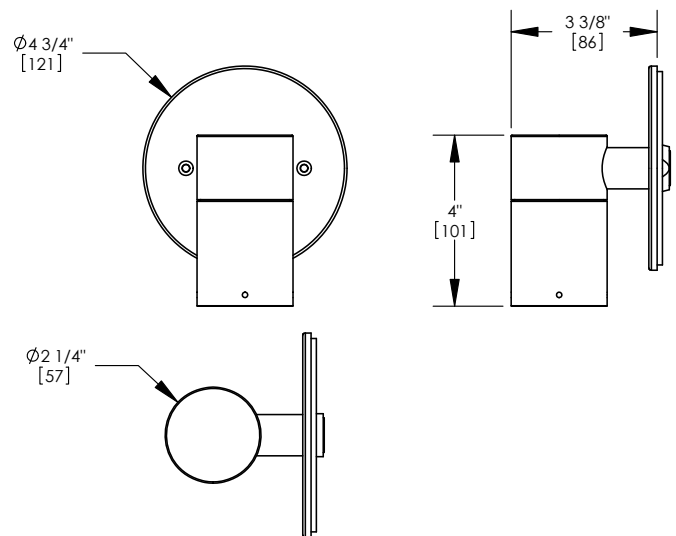

DESCRIPTION:

Wall mount MR16 accent fixture. Suitable for wet/damp/dry location installations.

MATERIAL:

Standard overall material is 6061 aluminum.

HL-340 - Machined Aluminum (Standard)

HL-340-2b - Machined Brass

FINISH:

AA - Anodized Satin Aluminum

AP - Powder Coat Aluminum

BK - Powder Coat Black

BZ - Powder Coat Bronze

WT - Powder Coat White

N - Natural, for Stainless Steel and Brass

HALOGEN LAMPING OPTION:

Lamp Type - 12V halogen MR16 lamp, bi-pin GX5.3 base, 50W max, not included (standard).

LED OPTIONS

Integral high output LED, warm white 85 CRI (3000K CCT) standard, others available.

3LED - 3W LED - 180 lumens

8LED - 8W LED - 300 lumens

8LED-E - 8.4W LED - 565 lumens

OPTICS

3LED and 8LED:

SP - Spot, 12°

NF - Narrow Flood, 24°

FL - Flood, 36°

8LED-E:

SP - Spot 14°

NF - Narrow Flood, 25°

MF - Medium Flood, 30°

FL - Flood, 40°

VOLTAGE:

12 - 12 VAC output transformer required, not included.

MOUNTING:

Fixture is equipped with a 4.75" mounting plate and (2) mounting screws.

OPTIONS:

Glare shields

GL-10 - Short Angled, aluminum

GL-11 - Angled, aluminum

GL-12 - Angled, brass

GL-13 - Straight, aluminum

GL-14 - Straight, brass

Lenses/Louvers/Color Filters

LA-1 - Hexcell Louver (Black)

LA-2 - Prismatic lens

LA-3 - Linear spread lens

LA-4 - Soft focus lens (diffused)

LA-5 - Moonlight lens

LA-6 - Blue lens


See fixture accessories for more information.

SAMPLE ORDER SPECIFICATION:

HL-340-AA-12-LA-6

RATING:

Wet/damp/dry location.

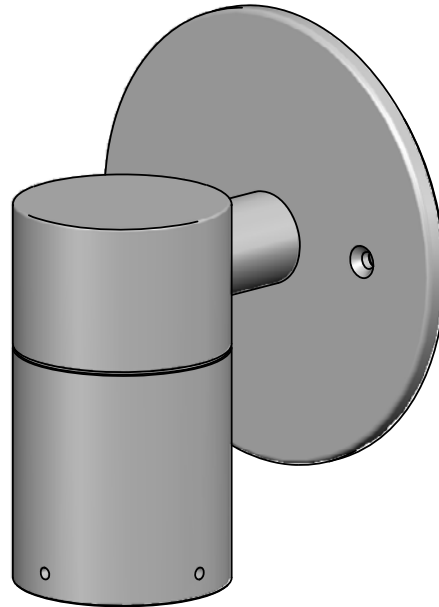

MADE IN THE USA

LULA LUMINAIRE LLC

2361-B S. Robertson Blvd.

Los Angeles, CA. 90032

424.333.0054

info@lula.biz



DESCRIPTION:

Small reliable electronic hardwire transformers for use with low voltage halogen lighting fixtures. Moisture and shock resistance. Emits no audible noise, low harmonic distortion, high power factor.

MODELS AVAILABLE:

- HLT-60E - 60W
- HLT-75E - 75W
- HLT-105E - 105W
- HLT-150E - 150W

VOLTAGE:

All transformers include electrical short circuit and overload protection with automatic reset (resets after short is corrected).

120 - 120 VAC input/11.7 VAC output

MOUNTING:

Requires mounting box, not included.


SAMPLE ORDER SPECIFICATION:

HLT-75E-120


RATING:

UL and C-UL Recognized.


MADE IN THE USA

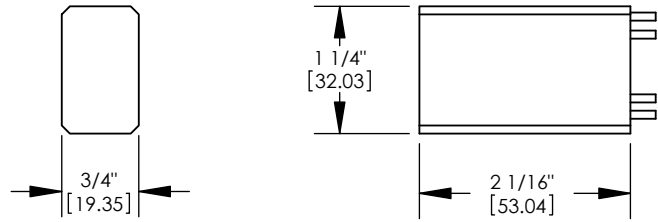

HLT-60E & HLT-75E

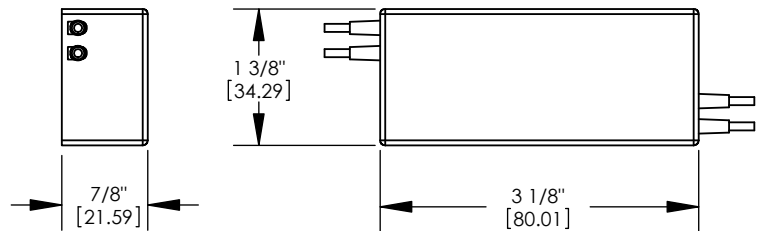

HLT-105E

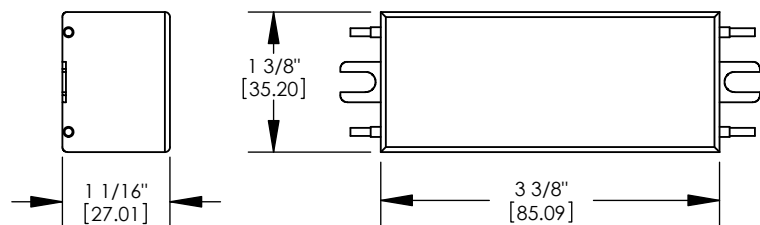

HLT-150E

