




Fixture Type  
Materials  
Finish

Exterior Wall  
Metal  
White Matte  
\*consult factory for other finishes

Lamp Type  
Lamp Quantity  
Lamp Included  
Wattage  
Input Voltage  
Delivered Lumens  
Kelvin  
CRI  
Power S Type  
Power S Quantity  
Power S Location  
Dimming Type

LED  
1  
Yes  
22W  
120V  
1814  
2700 K  
90  
Driver  
1  
-  
1-10V

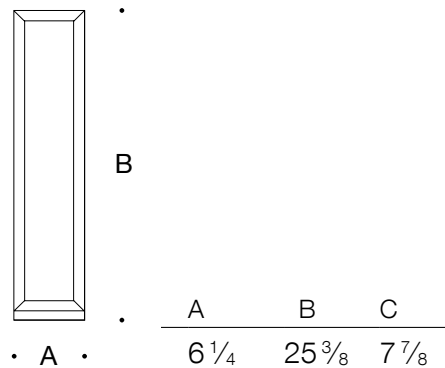


Designer

BEGA

Listings

UL / ETL  
IC Rated  
WET



## Application

An unshielded wall luminaire with light output on all sides. The linear shape of this luminaire with its square profile makes it particularly suitable for installation on columns, walls, and pillars.

## Materials

Luminaire housing constructed of die-cast and extruded marine grade, copper free ( $\leq 0.3\%$  copper content) A360.0 aluminum alloy  
White impact resistant acrylic diffuser  
High temperature silicone gasket  
Mechanically captive stainless steel fasteners

**NRTL** listed to North American Standards, suitable for wet locations

Protection class IP65

Weight: 14.6lbs

## Electrical

Operating voltage	120-277V AC
Minimum start temperature	-30° C
LED module wattage	18.6 W
System wattage	22 W
Controllability	0-10V dimmable
Color rendering index	Ra > 80
Luminaire lumens	1814 lumens (3000K)
Lifetime at Ta = 15° C	112,000 h (L70)
Lifetime at Ta = 45° C	68,000 h (L70)

## LED color temperature

- 4000K - Product number + **K4**
- 3500K - Product number + **K35**
- 3000K - Product number + **K3**
- 2700K - Product number + **K27**

**BEGA** can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

## Finish

All BEGA standard finishes are matte, textured polyester powder coat with minimum 3 mil thickness.

Available colors  Black (BLK)     White (WHT)     RAL:  
 Bronze (BRZ)     Silver (SLV)     CUS:

