



Fixture Type  
Materials  
Finish

Specialty Linear Systems  
Aluminium  
Black  
\*consult factory for other finishes

Lamp Type  
Lamp Quantity  
Lamp Included  
Wattage  
Input Voltage  
Delivered Lumens  
Kelvin  
CRI  
Power S Type  
Power S Quantity  
Power S Location  
Dimming Type



LED  
1  
Yes  
1W  
24 VDC  
60  
3000K  
90  
Driver  
1  
Remote  
n/a

Designer

LumTech

Listings

UL  
DRY

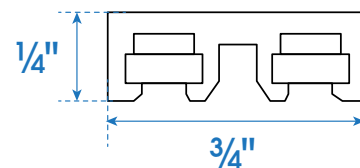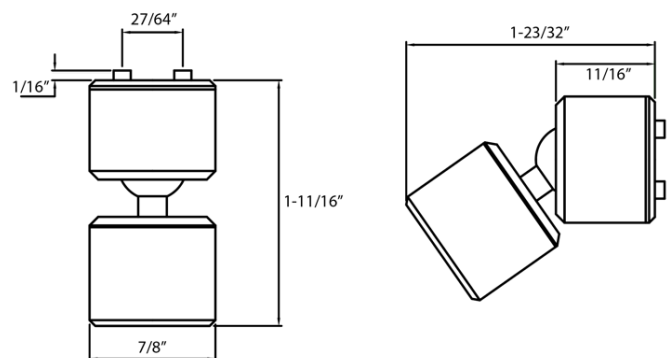



### DESCRIPTION

Lum-Tech's new MAGNETRAX™ Mini Magnetic Track “brings back the fun to functional”. Our discreet, low-profile magnetic track can be mounted horizontally or vertically anywhere power is needed. There is a wide range of fixed or adjustable LED mini-trackheads and linear lightbars that simply click anywhere along the track. The best feature is that all the diminutive trackheads can easily be moved as the contents of the display change over time – no need to worry about costly rewiring since all the trackheads are held and powered magnetically.

### FEATURES

- Each trackhead is held and powered magnetically for easy movement
- Suitable for mounting inside cabinet, under-cabinet or shelf mount.
- 60 lumens with just 1W
- CRI of 90+
- 20°, 30°, 40° beam angle option
- 3 Step MacAdam LED
- 40° Vertical Adjustable aim
- 360° Horizontal Adjustable aim


### ORDERING INSTRUCTIONS

MODEL	BEAM ANGLE	CCT/CRI	FINISH
MMT-S302	30: 30° *20: 20° *40: 40°	4090: 4000K, 90 CRI *3090: 3000K, 90CRI	BK: Black *SV: Silver *WH: White

\* Contact Factory

NOTE: Should be used with MMT-TRK mini magnetic track. Sold separately. Please see MMT-TRK spec sheet for more details.



### SPECIFICATIONS

Input Voltage	24V DC
Wattage	1W
Color Temperature	4000K, *3000K
Beam Angle	30°, *20°, *40°
CRI	90
Lumen Output	60 lm
Efficacy	60 lm/W
Vertical Aim	40°
Horizontal Aim	360°
Finish	Black, *Silver, *White
Environment	UL Listed for Dry Location (Indoor only)
Certification	
Warranty	5 Years – see published warranty terms for detailed information

\* Contact Factory

NOTE: To reduce risk of fire, do not install in a compartment smaller than 450 cubic/inches per 14.5W max

### PHOTOMETRIC DATA

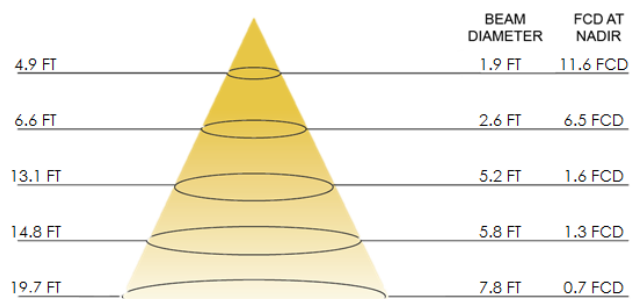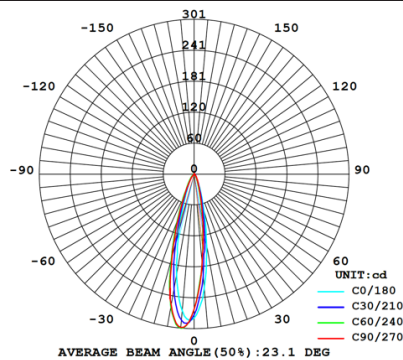

LULA LUMINAIRE LLC  
2361-B S. Robertson Blvd.  
Los Angeles, CA. 90032  
424.333.0054  
info@lula.biz



JESCO's MAGNETRAX™ MINI Magnetic Track "brings back the fun to functional". Our discreet, low-profile magnetic track can be mounted horizontally or vertically anywhere power is needed. There is a wide range of fixed or adjustable LED mini-trackheads and linear lightbars that simply click anywhere along the track. The best feature is that all the diminutive trackheads can easily be moved as the contents of the display change over time – no need to worry about costly rewiring since all the trackheads are held and powered magnetically. The MMT construction is made out of extruded polycarbonate with stainless steel bus bar.



24V DC



INDOOR



SURFACE MOUNT



RECESSED MOUNT

5 YEAR WARRANTY



UL LISTED

## SPECIFICATIONS

<b>INPUT VOLTAGE</b>	24V DC
<b>INPUT CURRENT</b>	4A Max
<b>DIMENSIONS</b>	3/4" W x 1/4" H
<b>AVAILABLE LENGTHS</b>	24" and 48"
<b>ENVIRONMENT</b>	Indoor - Dry
<b>MOUNTING</b>	Under-cabinet or shelf mount with screws
<b>AVAILABLE FINISH</b>	Black and White
<b>CERTIFICATIONS</b>	cULus
<b>WARRANTY</b>	5 Years

## COMPATIBLE FIXTURES

[MAGNETRAX™ MINI Magnetic Spots](#)

[MAGNETRAX™ MINI Magnetic Light Bars](#)

[DL-FLEX2 Series](#)

[S601 / S601P / S602P](#)

[S700](#)

[CBF](#)

## ORDERING INFO

SERIES	LENGTH	FINISH
<b>MMT-TRK</b>	24 - 24" 48 - 48"	<b>BK</b> - Black <b>WH</b> - White

### CONNECTORS

CONNECTING CABLE

**MMT-CCE02**

2" Connecting Cable

CONNECTORS

**MMT-**

**IDC** - I Connector

**LC** - L Connector

### INPUT, SPLIT AND EXTENSION CABLES

POWER FEED

**MMT-PFI-48**

48" Power feed input cable

SPLIT CABLE

**DL-PS-**

**2Y** - 2-way split cable

**3Y** - 3-way split cable

EXTENSION CABLE

**DL-PS-**

**EXT48** - 48" Extension cable

**EXT96** - 96" Extension cable

### OUTPUT AND EXTENSION CABLES

OUTPUT CABLE

**MMT-PFO-02**

2" Output cable

EXTENSION CABLE

**DL-PS-EXT-PG03**

3" Extension cable

FLEX POWER CABLE

**DL-FLEX2-IG-PC12**

12" DL-FLEX2 power cable

S601 POWER CABLE

**S601-IG-PC12**

12" S601P / S601P / S602P power cable

S700 POWER CABLE

**S700-PC12**

**S700-PC60**

12" & 60" S700 power cable

## WIRING ACCESSORIES

### Power Supply Connectors




<b>PART NUMBER</b>	<b>MMT-PFI-48</b>
<b>DESCRIPTION</b>	Power Feed Input. Connects power supply to MMT-TRK. Includes 1 end cap.
<b>DIMENSIONS</b>	48" (1219 mm)    1" (25.4mm) 1/4" (6.35 mm)    3/4" (19 mm)

ORDERING INFORMATION

**MMT-PFI-48**


**BK** - Black

**WH** - White

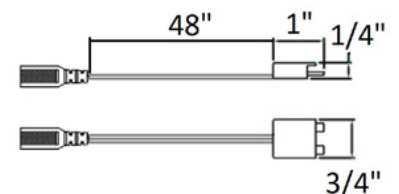



<b>PART NUMBER</b>	<b>MMT-CCE02</b>
<b>DESCRIPTION</b>	Connecting Cable. Connects two MMT-TRK, attaches magnetically. Includes 2 end caps.
<b>DIMENSIONS</b>	5/8" (9.5 mm)    1/4" (6.35 mm) 7/8" (22 mm)    2" (51 mm)

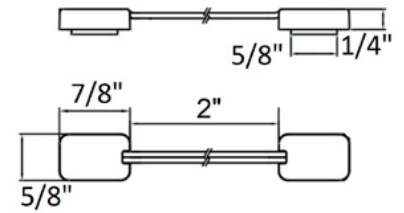


ORDERING INFORMATION

<b>MMT-CCE02-</b>	
<b>BK</b>	- Black
<b>WH</b>	- White




<b>PART NUMBER</b>	<b>MMT-IDC</b>
<b>DESCRIPTION</b>	I Connector. Connects two MMT-TRK end to end.
<b>DIMENSIONS</b>	5/8" (9.5 mm)    1/16" (1.5875 mm)    3/16" (48 mm)




ORDERING INFORMATION

**MMT-IDC**



<b>PART NUMBER</b>	<b>MMT-LC</b>
<b>DESCRIPTION</b>	L Connector. Connects two MMT-TRK to form an L configuration.
<b>DIMENSIONS</b>	1/4" (6.35 mm)    3/4" (19 mm)



ORDERING INFORMATION

<b>MMT-LC-</b>	
<b>BK</b>	- Black
<b>WH</b>	- White

## Split and Extension Cables



<b>DESCRIPTION</b>	Connects power supply to MMT-PFI-48. Split cable 14".
--------------------	---

ORDERING INFORMATION


<b>DL-PS-</b>	<b>3Y</b>
<b>2Y</b>	- 2-way split cable
<b>3Y</b>	- 3-way split cable
<b>EXT48</b>	- 48" Extension cable
<b>EXT96</b>	- 96" Extension cable

## WIRING ACCESSORIES

### Power Supply Connectors



<b>PART NUMBER</b>	<b>MMT-PFO-02</b>
<b>DESCRIPTION</b>	Power Feed Input. Connects MMT-TRK to fixture specific Power Cable. May be extended using DL-PS-EXT-PG03. Max 2 Amps.
<b>DIMENSIONS</b>	5/8" (15.9 mm)    1/4" (6.35 mm) 2" (51 mm)    7/8" (19 mm)

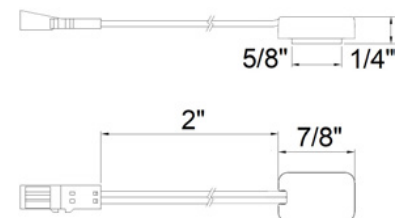


ORDERING INFORMATION

<b>MMT-PFO-02</b>	
<b>BK</b>	- Black
<b>WH</b>	- White





<b>PART NUMBER</b>	<b>DL-PS-EXT-PG03</b>		
<b>DESCRIPTION</b>	3" Extension Cable. Extends MMT-PFO-02 to fixture specific Power Cable. May use multiple for longer run. Max 2 Amps.		
<b>DIMENSIONS</b>	1/4" (6.35 mm)	1" (25.4 mm)	3" (76.2 mm)
	5/8" (15.9 mm)	2" (51 mm)	

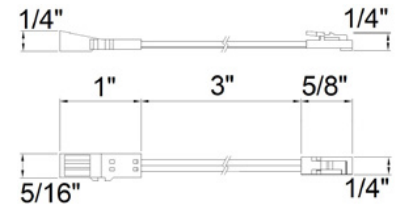

ORDERING INFORMATION

<b>DL-PS-EXT-PG03-</b>	
<b>BK</b>	- Black
<b>WH</b>	- White



<b>PART NUMBER</b>	<b>DL-FLEX2-IG-PC12</b>
<b>DESCRIPTION</b>	DL-FLEX2-UP Series Power Cable. Connects DL-FLEX2-UP to MMT-PFO02. Max 2 Amps.

ORDERING INFORMATION

<b>DL-FLEX2-IG-PC12-</b>	
<b>BK</b>	- Black
<b>WH</b>	- White



<b>PART NUMBER</b>	<b>S601-IG-PC12</b>
<b>DESCRIPTION</b>	12" S601 Power Cable. Connects S601, S601P or S602P to MMT-PFO02. Max 2 Amps.

ORDERING INFORMATION

<b>S601-IG-PC12-</b>	
<b>BK</b>	- Black
<b>WH</b>	- White



<b>PART NUMBER</b>	<b>S700-PC</b>
<b>DESCRIPTION</b>	12" and 60" S700 Power Cable. Connects S700 to MMT-PFO02. Max 2 Amps.

ORDERING INFORMATION

<b>S700-PC</b>	
<b>12</b>	- 12" Power Cord
<b>60</b>	- 60" Power Cord

## LED POWER SUPPLIES • 24V DC • PLUG & PLAY



MODEL	DL-PS-WP24/24	DL-PS-24/24	DL-PS-48/24	DL-PS-60/24	DL-PS-100/24
<b>RATED POWER</b>	24W	34W	48W	60W	100W
<b>RATED CURRENT</b>	1.0A	1.0A	2.0A	2.5A	3.8A
<b>INPUT</b>	120V AC	120V AC	120V AC	120V AC	120V AC
<b>DC OUTPUT</b>	24V DC	24V DC	24V DC	24V DC	24V DC
<b>POWER FACTOR</b>	0.80	0.80	0.84	0.80	0.90
<b>WIDTH W</b>	1 3/4"	1 1/2"	2"	1 1/2"	2 3/8"
<b>LENGTH L</b>	3 1/4"	3 1/2"	4 3/8"	4 3/8"	5 3/4"
<b>HEIGHT H</b>	1 1/4"	1"	1 1/8"	1 1/2"	1 1/4"

LULA LUMINAIRE LLC  
 2361-B S. Robertson Blvd.  
 Los Angeles, CA. 90032  
 424.333.0054  
 info@lula.biz





MODEL	DL-PS-60/24-CL2	DL-PS-90/24-CL2	DL-PS-100/24-CL2
RATED POWER	60W	90W	96W
RATED CURRENT	2.5A	3.8A	4.0A
INPUT	120V AC	120V AC	120V AC
DC OUTPUT	24V DC	24V DC	24V DC
POWER FACTOR	0.80	0.80	0.88
WIDTH W	2 1/8"	2 1/8"	2 3/4"
LENGTH L	5 1/8"	5 1/8"	7 7/8"
HEIGHT H	1 3/8"	1 3/8"	1 3/8"

## ORDERING INFO LPS

SERIES	WATTAGE / VOLTAGE / TYPE
DL-PS-	
	WP24/24 - 24 Watt 24 Volt wall-plug
	24/24 - 24 Watt 24 Volt wall-plug
	48/24 - 48 Watt 24 Volt wall-plug
	60/24 - 60 Watt 24 Volt wall-plug

## ORDERING INFO CL2

SERIES	WATTAGE / VOLTAGE	TYPE
DL-PS-		-CL2
	60/24 - 60 Watt 24 Volt wall-plug	
	90/24 - 90 Watt 24 Volt wall-plug	
	100/24 - 96 Watt 24 Volt wall-plug	

## RADIANZ REMOTE POWER SYSTEM

Li-ion Battery with Charger



MODEL	BATT-LI-24V-100WH	BATT-LI-24V-150WH	BATT-LI-24V-266WH
OUTPUT	24V AC	24V AC	24V AC
CAPACITY	100WH	100WH	100WH
MAX. WATTAGE	60W	60W	60W
FULL CHARGE TIME	3	4	5

## ORDERING INFO

SERIES	RATINGS
BATT-LI-24V-	
	100WH - 24VDC 100WH
	150WH - 24VDC 150WH
	266WH - 24VDC 266WH

LULA LUMINAIRE LLC  
2361-B S. Robertson Blvd.  
Los Angeles, CA. 90032  
424.333.0054  
info@lula.biz



### SYSTEM OVERVIEW

