




Fixture Type Garden Fixture
Materials Steel and Glass
Finish Fumé
 *consult factory for other heights

Lamp Type LED
Lamp Quantity 1
Lamp Included Yes
Wattage 1.6W
Input Voltage 12 VDC
Delivered Lumens 200
Kelvin 3000 K
CRI -
Power S Type Driver
Power S Quantity Up to 150 fixtures
Power S Location Remote
Dimming Type MLV

Designer Bullard Bollard

Listings ETL / CE
 WET
 UL

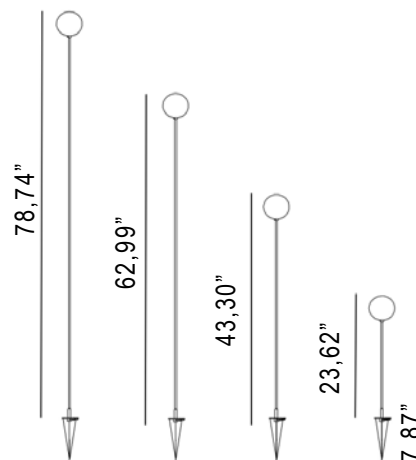



IP 65

IK 07



MODEL:

Code	23,62"	SOP3AH1 - 600 mm/ 200 mm spike
	43,30"	SOP3AH2 - 1100 mm/ 200 mm spike
	62,99"	SOP3AH3 - 1600 mm/ 200 mm spike
	78,74"	SOP3AH4 - 2000 mm/ 200 mm spike
Product family		Outdoor Lighting



TECHNICAL DETAILS:

Installation	into the ground with the supplied spike
Class	III
Power	1,6 W
Luminous flux	200 lm
LED color	3000K
Optics	360°
Resistance to breakage	IK 07
Protection degree	IP 65
Weight	1,5-2-2,5-3 kg
Electric connection	12 V
Material	stainless steel AISI 316L
Driver	not included
Cables	wired with 3 mt
Diffuser	hand-blown sandblasted glass diffuser

PRODUCT'S DESCRIPTION:

Wired with external cable L= 3 mt.
Fixing to the ground with the spike included.
4 heights : 60, 110, 160 e 200 cm.
Remote driver not included.

COLORS:

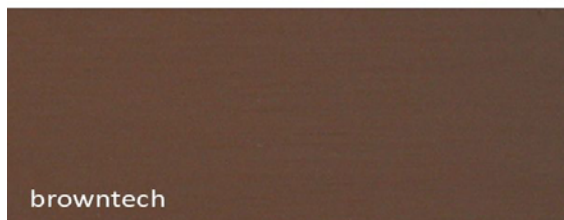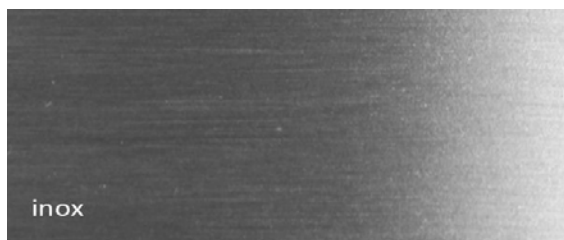

.IN

Inox

.BR

Browntech





IP 65

IK 07



MODEL:

Code	SOP3BH1 - 600 mm/ 200 mm spike SOP3BH2 - 1 100 mm/ 200 mm spike SOP3BH3 - 1 600 mm/ 200 mm spike SOP3BH4 - 2000 mm/ 200 mm spike
Product family	Outdoor Lighting



TECHNICAL DETAILS:

Installation	into the ground with the supplied spike
Class	III
Power	1,6 W
Luminous flux	200 lm
LED color	3000K
Optics	360°
Resistance to breakage	IK 07
Protection degree	IP 65
Weight	1,5-2-2,5-3 kg
Electric connection	12 V
Material	stainless steel AISI 316L
Driver	not included
Cables	wired with 3 mt
Diffuser	Hand-blown colored glass diffuser
Diffuser colors :	Amber, Green and Fumé

PRODUCT'S DESCRIPTION:

Wired with external cable L= 3 mt.
Fixing to the ground with the spike included.
4 heights : 60, 110, 160 e 200 cm.
Remote driver not included.

COLORS:

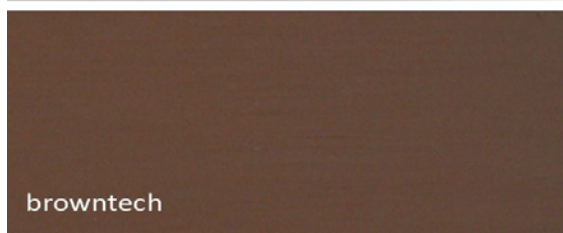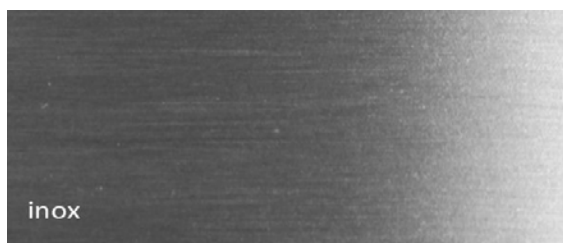


.IN

Inox

.BR

Browntech



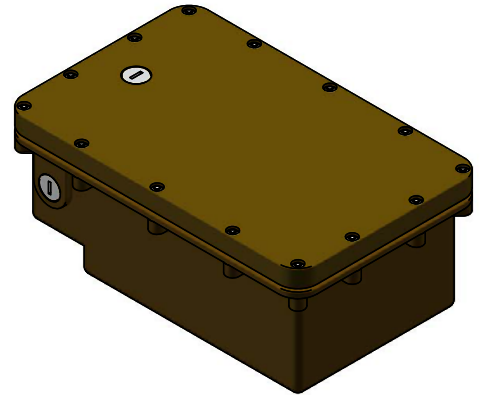

DIRECT-BURIAL

FEATURES

- 10 YEAR FREE REPLACEMENT WARRANTY
- FULLY DIMMABLE, WITH LOW-VOLTAGE MAGNETIC DIMMER
- COMPRESSION MOLDED, FIBERGLASS REINFORCED POLYESTER COMPOSITE HOUSING
- STANDARD WITH MANDATORY SECONDARY PROTECTION
- RESISTANT TO RUST, CORROSION, OILS, GASOLINE, & DETERGENTS
- PRIMARY WIRING COMPARTMENT & ANTI-SIPHON BARRIER
- BUILT IN THE USA TO THE HIGHEST STANDARDS
- MEETS OR EXCEEDS ALL UL, CUL, ANSI/UL, CSA REQUIREMENTS.

REQUIREMENTS



- LISTED TO UL STANDARD 1838 FOR LANDSCAPE LIGHTING
- MANDATORY SECONDARY PROTECTION, AS STATED IN THE NATIONAL ELECTRIC CODE ARTICLE 411, (1993, 1996, 1999, 2002, 2005 AND 2008)
- MAY BE USED WITH INDIVIDUAL "LISTED" COMPONENTS TO MEET "SYSTEM" REQUIREMENTS, AS LONG AS ALL PARTS LISTED TO SAME ANSI/UL STANDARD

PART NUMBER
PRIMARY VOLTAGE
OUTPUT VOLTAGE
BREAKERS
FREQUENCY
DIMENSIONS
WEIGHT

CLASS 1	CLASS 1
1030-TL (100 Watt)	1031-TL (300 Watt)
120VAC-1A MAX	120VAC-3A MAX
12-15VAC-8.3A MAX	12-15VAC-25A
1x10A	1x25A
60 Hz	60 Hz
12" x 7.5" x 6"	12" x 7.5" x 6"
20 LBS.	22 LBS.

