



Fixture Type
Materials
Finish

Pendant
Polyethylene
White
*consult factory for other finishes

Lamp Type
Lamp Quantity
Lamp Included
Wattage
Input Voltage
Delivered Lumens
Kelvin
CRI
Power S Type
Power S Quantity
Power S Location
Dimming Type


LED
1
Yes
36W
120
2080
90
CRI
Driver
1
Integral
ELV

Designer

Marset


Listings

UL / ETL
IC Rated, Air Tight
JA8 Listed /
Compliant
ASTM E283
WET

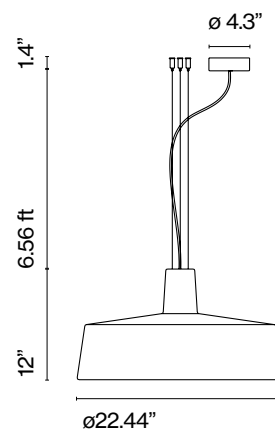





Soho 112 IP44



Soho 57 IP44



Soho 38 IP44



Soho 112 IP44

Light Source:
LED SMD 350mA 93.6W 2700K
CRI80 15648lm
Luminaire:
120 - 277 VAC 0-10V 160W 8085lm

Soho 57 IP44

Light Source:
LED SMD 700mA 28.7W 2700K
CRI80 3446lm
Luminaire:
Only 120 VAC TRIAC 36W 2086lm
120 - 277 VAC 0-10V 36W 2086lm

Soho 38 IP44


Light Source: LED SMD 700mA
13.2W 2700K CRI80 1848lm
Luminaire: 100 - 120 VAC TRIAC 16W
1051lm

LED included

Black electrical cord

Shade in rotary moulded polyethylene. Methacrylate opal diffuser. Metal support lacquered in black with stainless anti-oxidant cataphoresis treatment for outdoor. Cable support for the wall version.



- White
- Stone Grey
- Black



Suitable for wet locations

- [Download](#) Assembly Instructions
- [Download](#) Photometric Data
- [Download](#) 2D
- [Download](#) 3D

Range



⚠ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

marsetusa@marset.com
www.marset.com

LULA LUMINAIRE LLC
2361-B S. Robertson Blvd.
Los Angeles, CA. 90032
424.333.0054
info@lula.biz

